

Alcatel-Lucent MDR-8000


2 GHz WCS DIGITAL RADIOS



OVERVIEW

The MDR-8X02 is Alcatel-Lucent's premier digital microwave radio for long-haul, point-to-point wireless communications. The flexible platform offers features designed to provide robust operation, while also reducing your total cost of ownership. With a common platform that supports virtually all frequency bands from 2–11 GHz, the MDR-8X02 operates in the 2.305–2.360 GHz WCS band. This radio offers customers transmission capacity from 2–16 DS1s and 10/100/1000 Base-T Ethernet, with the ability to upgrade capacity simply by changing Capacity Keys™.

By leveraging Alcatel-Lucent's superior technology in power amplifiers and using direct modulation, the MDR-8X02 improves overall system quality. It also utilizes existing infrastructure with the WCS spectrum. In many cases, the MDR-8X02 enables 2.4 GHz spread-spectrum users and/or 2.1 GHz licensed users to upgrade radio capabilities without touching the tower, antenna, or transmission line. In new designs, lighter antennas and the use of coax minimize overall system costs. Compact mechanical dimensions and low power consumption allow operators to place the MDR-8X02 in cramped spaces without sacrificing system performance and availability.

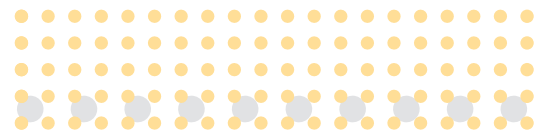


C O S T - S A V I N G F E A T U R E S

- Industry-high system gain
 - ↪ Allows longer paths, potentially avoid repeater sites
 - ↪ Allows smaller antennas
 - Lower purchase price
 - Reduces tower loading & rent
 - ↪ Improves path availability
- Common platform for all frequency bands & capacities
 - ↪ Simplifies training and maintenance
 - ↪ Minimizes spares
- In-service capacity upgrades
 - ↪ Graceful migration to higher capacities
 - ↪ No stranded investment
- Flexible Ethernet options
 - ↪ Provision bandwidth dynamically, as needed
 - ↪ Combined data throughput of 48 Mb/s using dual channel mode
 - ↪ Auto-sensing simplifies installation and turn-up
- Low power consumption
 - ↪ Reduces size of DC power plant and batteries
 - ↪ Reduces cost of HVAC
- Small size
 - ↪ Reduces amount of rack space needed

P E R F O R M A N C E - E N H A N C I N G F E A T U R E S

- All-indoor operation
 - ↪ No tower-mounted electronics
 - ↪ Simplifies maintenance and troubleshooting
- Industry-leading receiver selectivity and interference rejection
 - ↪ Allows coordination in frequency congested areas
 - ↪ Speeds up licensing
- Full range of configurations
 - ↪ Nonstandby, hot-standby, space diversity
 - ↪ Provides full equipment protection
 - ↪ Used to overcome poor path conditions
- Robust multipath countermeasures
 - ↪ Used to overcome propagation problems

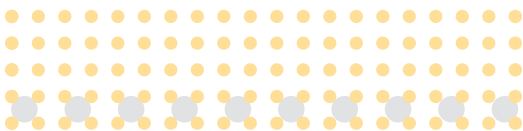

MDR-8502 - Maximum System Gain

EQUIPMENT IDENTIFIER	MDR-8502-2	MDR-8502-4	MDR-8502-8
Frequency Band (GHz)	2.305 - 2.360	2.305 - 2.360	2.305 - 2.360
Emission Designator	1M25D7W	2M50D7W	3M75D7W
RF Channel Bandwidth (MHz)	1.25	2.5	3.75
Capacity per RF Channel (DS1s)	2	4	8
Modulation Type (TCM)	32	32	32
Radio Data Rate (Mb/s)	3.09	6.18	12.4
System Gain (BER = 10 ⁻⁶) @ 30 dBm (dB)*	116	114	111
Transmitter Power Output (dBm)	14	14	14
Optional Power Amplifier Outputs (dBm)	30	30	30
Receiver Threshold (BER = 10 ⁻⁶) (dBm)*	-86	-84	-81
Maximum RSL for 10 ⁻⁶ BER (dBm)*	-17	-17	-17
Dispersive Fade Margin for 10 ⁻³ BER (dB)	80	80	80
Threshold/Interference			
Cochannel (dB)	28	28	28
Adjacent Channel (dB)	-8	-8	-8

MDR-8702 - Maximum Spectral Efficiency


EQUIPMENT IDENTIFIER	MDR-8702-2	MDR-8702-4	MDR-8702-8	MDR-8702-12	MDR-8702-16
Frequency Band (GHz)	2.305 - 2.360	2.305 - 2.360	2.305 - 2.360	2.305 - 2.360	2.305 - 2.360
Emission Designator	800KD7W	1M25D7W	2M50D7W	3M75D7W	5M00D7W
RF Channel Bandwidth (MHz)	0.8	1.25	2.5	3.75	5.0
Capacity per RF Channel (DS1s)	2	4	8	12	16
Modulation Type (TCM)	128	128	128	128	128
Radio Data Rate (Mb/s)	3.09	6.18	12.4	18.5	24.7
System Gain (BER = 10 ⁻⁶) @ 30 dBm (dB)*	112	110	107	105	104
Transmitter Power Output (dBm)	14	14	14	14	14
Optional Power Amplifier Outputs (dBm)	30	30	30	30	30
Receiver Threshold (BER = 10 ⁻⁶) (dBm)*	-82	-80	-77	-75	-74
Maximum RSL for 10 ⁻⁶ BER (dBm)*	-17	-17	-17	-17	-17
Dispersive Fade Margin for 10 ⁻³ BER (dB)	80	80	80	69	66
Threshold/Interference					
Cochannel (dB)	34	34	34	34	34
Adjacent Channel (dB)	-8	-8	-8	-8	-8

MDR-8X02E - Ethernet Radios

EQUIPMENT IDENTIFIER	MDR-8502E-8	MDR-8702E-12	MDR-8702E-24
Ethernet Specifications			
Ethernet Forwarding Capacity	Up to 8 Mb/s	Up to 12 Mb/s	Up to 24 Mb/s
	14,585 pps	21,611 pps	44,448 pps
Ethernet Latency (S/F)	265-1270 μ s	185-1180 μ s	95-575 μ s
RF Specifications			
Frequency Band (GHz)	2.305 - 2.360	2.305 - 2.360	2.305 - 2.360
Emission Designator	2M50D7W	2M50D7W	5M00D7W
RF Channel Bandwidth (MHz)	2.5	2.5	5
TDM Lines Capacity	5xDS1	8xDS1	16xDS1
Modulation Type (TCM)	32	128	128
Radio Data Rate (Mb/s)	9.093	13.135	26.27
System Gain (BER = 10^{-6}) @ 30 dBm (dB)*	113	107	104
Transmitter Power Output (dBm)	14	14	14
Optional Power Amplifier Outputs (dBm)	30	30	30
Receiver Threshold (BER = 10^{-6}) (dBm)*	-83	-77	-74
Maximum RSL for 10^{-6} BER (dBm)*	-17	-17	-17
Dispersive Fade Margin for 10^{-3} BER (dB)	80	80	66
Threshold/Interference			
Cochannel (dB)	28	34	34
Adjacent Channel (dB)	-8	-8	-8

*Typical values as measured at the antenna port for nonstandby and hot-standby/space diversity configurations. Hot-standby configurations will have 1 dB less receiver threshold on the A side and 10 dB less receiver threshold on the B side.

Note: These specifications are subject to change without notice.

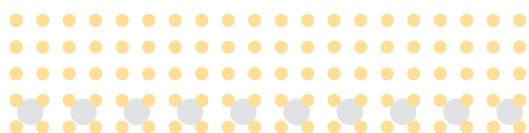

TECHNICAL SUMMARY

Power Requirements

- Input voltage: +/- 20 V dc to +/- 60 V dc
- Typical power consumption per T/R @ 14 dBm:
 - MDR-8X02 (DS1): 66 Watts
 - MDR-8X02E (Ethernet): 71 Watts


Mechanical Dimensions & Interfaces

- Size: 12.25 x 19.0 x 16.25 in.
- Weight (1+1): 70 lb.
- RF interface: SMA (female) – other RF interfaces available
- DS1 interface: 37 pin D-type
- Ethernet interface: RJ-45 standard data connector or optical SFP
- Orderwire handset interface: RJ-11 standard telephone handset jack
- Alarm/Management interfaces:
 - SNMP = RJ-48, 10 Base-T
 - US1 = RS-232
 - MCS-11 = RS-422
 - TBOS = RS-485
 - Parallel = Form A relays

Environmental

- Ambient temperature:
 - Specification compliant: 0° to +50° C
 - Operating without failure: -20° to +65° C
 - Storage: -40° to +80° C
- Relative humidity: 5 to 95% noncondensing
- Altitude:
 - Operating: -350 to 16,500 ft.
 - Storage: -350 to 40,000 ft..

Note: These specifications are subject to change without notice.

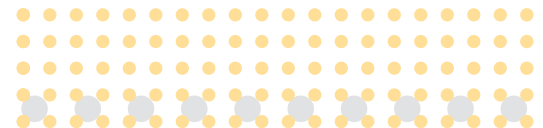

ABOUT ALCATEL-LUCENT WIRELESS TRANSMISSION:

With more than 50 years of experience in wireless transmission, Alcatel-Lucent provides the solid foundation for your mission-critical network, and continually fosters visions for the future. As a pioneer in point-to-point microwave radios, Alcatel-Lucent has demonstrated leadership in wireless technology.

Our history of design innovation began when the former Collins Radio Company developed the first commercial microwave radios in the 1950s. Alcatel-Lucent maintains the Collins tradition, setting the industry standard for microwave communications all over the world with scalable, reliable, economical and readily deployable wireless backbone communications systems.

In the last five years, Alcatel-Lucent has installed more than 300,000 microwave radios in more than 150 countries. For more information, visit www.alcatel-lucent.com/microwave or call 1-800-ALCATEL.

www.alcatel-lucent.com

Alcatel, Lucent, Alcatel-Lucent and Alcatel-Lucent logo are trademarks of Alcatel-Lucent. All other trademarks are the property of their respective owners. The information presented is subject to change without notice. Alcatel-Lucent assumes no responsibility for inaccuracies contained herein.
© 2007 Alcatel-Lucent. All rights reserved. 08-15-07 523-0620231-010A3J

